

---

# Relative Efficiency of Different Tillage Practices and Their Effect on Soil Physical Properties under Semi-Arid Climate of Tandojam, Pakistan

NAIMATULLAH LEGHARI\*, AMANAT ALI\*\*, AND MUNIR AHMED MANGRIO\*\*\*

RECEIVED ON 15.05.2015 ACCEPTED ON 16.09.2015

## ABSTRACT

Tillage practices affect physical properties of soil that are crucial for better crop production. The study was carried out to compare the efficiency of two different tillage implements and their effect on some soil physical properties. The tillage implements included cultivator and disc plow. The soil properties viz. soil moisture, bulk density and infiltration rate were determined before and after the tillage practices. However, the efficiency of tillage operation including operating speed, travel reduction and fuel consumption were taken during the tillage operation. The comparative analysis showed that the cultivator was better in reducing soil bulk density (12-18%) along with increasing the infiltration rate up to 61.5% and conserving soil moisture up to 95%. The disc plow, on the other hand, reduced the bulk density of soil more effectively with up to 21% efficiency and enhancing soil porosity (23%). However, disc plow was less efficient in increasing infiltration rate (38%) and conserving soil moisture (87-90%). Comparatively higher fuel consumption (23.3 L hr<sup>-1</sup>) was observed in operating disc plow with less operating speed (4.1 km hr<sup>-1</sup>) and higher travel reduction (27.5%). On the other hand, higher cultivator operating speed (4.76km hr<sup>-1</sup>) was observed with less travel reduction (21.8%) and fuel consumption (14.9 Lhr<sup>-1</sup>). The cultivator, being more economical and having good effects on soil properties, was the best option for tillage operations in the clay soils of cotton-wheat rotation system under semi-arid climate of Tandojam, Pakistan.

**Key Words:** Tillage, Efficiency, Soil Bulk Density, Soil Porosity, Fuel Consumption, Tandojam.

## 1. INTRODUCTION

Soil health is determined by its physical, chemical and biological properties. Tillage practices modify the soil physical properties including soil bulk density, porosity, infiltration, penetration resistance, aggregation [1]. Tillage contributes about 20% in the crop production [2] by increasing soil porosity & infiltration rate and by decreasing bulk density that ultimately helps

in improved root growth [3-4]. However, the depth of tillage implement may change the intensity of effect on physical properties of soil. The disc harrow has been more effective in altering the upper soil conditions with increasing soil porosity and reducing bulk density of as compared to Chisel that resulted in higher bulk density and less porosity [5]. On the other hand, long term no

---

\* Department of Farm Power & Machinery, Faculty of Agricultural Engineering, Sindh Agricultural University, TandoJam, Hyderabad, Sindh  
\*\* Soil Science Division, Nuclear Institute of Agriculture (NIA) Tandojam, Hyderabad, Sindh  
\*\*\* Department of Irrigation and Drainage, Faculty of Agricultural Engineering, Sindh Agricultural University, TandoJam, Hyderabad, Sindh

tillage negatively affect the soil physical properties including compaction of upper soil layer, hampering root growth and water infiltration [6].

The controversy of using different tillage systems had diverted the research focus from determining the economic efficiency of tillage implements that may reduce the cost of crop production. Tillage is one of the highest energy consumers in crop production factors [7]. Economic efficiency of different tillage practices including chiseling and disc plowing recorded the most time consumption along with higher consumption of fuel [8]. An increase of 1 cm in ploughing depth of tillage implement may result in enhanced fuel consumption from 0.5-1.5 L ha<sup>-1</sup> depending on the soil constituents as reported by Moitzi [7]. However, in Ethiopia, deep tillage implements of subsoiler, tie-ridger, and sweep have been developed that are economical, energy-efficient, break the soil hardpan along with increasing the root growth of plants [9]. On the other hand, the tillage implements with shallow depth, also called as non-inversion tillage has the potential in reducing cost of production through minimizing fuel costs and timeliness of field operations in addition to minimizing soil erosion, improving soil structure, porosity, infiltration and water holding capacity [10].

Pakistan economy is mostly based on agriculture. About 62% population of Pakistan is directly or indirectly involved to agriculture. Hence, promoting agriculture with reduced farmer financial inputs may contribute to cut off the cost of crop production leading to the prosperity of the farming community and nation. As the fuel prices in Pakistan are rising day by day, hence exploring the fuel efficient tillage methods has become indispensable. Therefore, the present study was conducted to evaluate the efficiency of two most widely used tillage implements for reducing cost of crop production along with positive effects on soil physical properties in agro-climatic conditions of Tandojam, Pakistan.

## **2. MATERIALS AND METHOD**

The current study was carried out to evaluate the efficiency of cultivator and disc plow and their effect on physical properties of soil in year 2014. The study was conducted at Latif experimental farm Sindh Agriculture University, Tandojam. The plot size used was 20x30m (600m<sup>2</sup>) replicated thrice. Two treatments viz. T1 = cultivator and T2 = disc plow, were used in RCBD (Randomized Complete Block Design). The physical properties of soil such as moisture, bulk density and infiltration rate were determined before and after the tillage practices. However, the economic efficiency of tillage operation including operating speed, travel reduction and fuel consumption were taken during the tillage operation. The data of operating speed, travel reduction and fuel consumption were recorded according to the recommendation of RNAM (Regional Network for Agricultural Machinery, USA) test codes and procedures for farm machinery [11].

### **2.1 Soil Analysis**

Soil samples were collected at different depths (0-15, 15-30 and 30-45cm) from each plot. Composite of three samples per plot were mixed, air-dried and sieved through a 2mm sieve. Soil texture was determined using Bouyoucus hydrometer method [12] by calculating the proportion of sand, silt and clay and comparing in USDA textural class triangle. Soil moisture contents were calculated by loss in weight after drying soil in oven for 24 hours at 105°C. Bulk density of soil was measured by core method [13] by calculating the soil mass collected in a defined volume of core. Soil infiltration rate was determined using infiltrometer rings as described by Murtaza, et. al. [14]. Two infiltrometer rings were inserted into soil; the small one was flooded with water with plastic sheet beneath. The same water level was maintained in

the large ring to prevent the lateral flow of water. Then the plastic sheet beneath small ring was removed gently and infiltration rate was recorded after the steady state reached.

## 2.2 Operating Speed

Outside the long boundaries of the test plots, two poles were placed at a distance of 25m in the middle of the test run. Similarly, two other poles were placed at a distance of 25m on the opposite side so that all four poles formed a rectangle. The operating speed was determined through the time required by the tractor plus tillage implement to cover the distance of 25m between the two poles. The time of travel by tractor equipped with implement was recorded using stop watch.

## 2.3 Effective Plowing Depth and Width

The plowing depths of cultivator and disc plow were measured with the steel scale. The depth was measured randomly from the bottom of the furrow to the surface level of the soil from test plots. While effective plowing width of cultivator and disc plow was measured by using the same scale. The width was measured from wall to wall of furrow for the total area tilled in each plot.

## 2.4 Travel Reduction

A simple method of determining travel reduction was used by making a mark with a chalk on the drive wheel of the tractor and the distance covered by tractor in 10 revolutions with no load (R) and with load (r). Five observations from each test plot were taken for measurement of travel reduction. The travel reduction was calculated by using the formula given by RNAM, [11].

$$T_r = \frac{R - r}{R} \times 100$$

Where  $T_r$  is Travel reduction (%), R is Distance traveled in ten revolution with no load (m), r is Distance traveled in ten revolution with load (m).

## 2.5 Fuel Consumption

The tractor (FIAT) tank was filled up to full level before operating tillage implements (cultivator and disc plow) in the test plot. After plowing of 600m<sup>2</sup> plot area, the fuel tank was refilled up to the full level using graduated cylinder of 1000 mL. The quantity of fuel required to refill the fuel tank up to the full level was recorded along with the total time taken to plow the test plot. The fuel consumption was calculated using the following formula

$$\text{Fuel Consumption Per Hectare (Liters)} = \frac{\text{Fuel Used Per Plot (Lit)}}{\text{Area of Plot (m}^2\text{)}} \times 10000$$

## 2.6 Effective Field Capacity

Effective field capacity (S) was calculated by the ratio of area covered by tractor to the productive and non-productive time as in the formula given below

$$S = \frac{A}{T_p + T_n}$$

Where S is Effective field capacity (ha/hr) A is Area covered (ha)  $T_p$  is Productive time (hr)  $T_n$  is Non-productive time (hr) (time lost for turning, loading and adjustment excluding refueling and machine trouble).

## 3. RESULTS AND DISCUSSION

The study was conducted in clay soil of Tandojam area having semi-arid climate as is evident from the Table 1. The soil had a mean bulk density of 1.41 g cm<sup>-3</sup> and infiltration rate of 0.65 cm hr<sup>-1</sup>. The soil history recorded as cotton-wheat rotation in the previous years. The two tillage implements tested had significant effect on soil

physical properties including bulk density, soil porosity, and infiltration rate and soil moisture content. Bulk density of soil tended to decrease with tillage. Disc plow having more effective plow depth (20.8cm), reduced soil bulk density (up to 21%) and increased soil porosity (23%) more efficiently when compared to cultivator with less plow depth (14.6cm) and before tillage as is evident from Figs. 1-2. Bulk density is generally used as a soil quality parameter in crop management and tillage studies. The same trend has also been reported early [15] where the bulk density reduced more profoundly by conventional tillage as compared to reduced tillage.

Similarly the chisel plough with more plowing depth resulted in reduced bulk density along with enhanced moisture conservation [16] under wheat cultivation. Tillage on appropriate soil moisture level loosens the soil with consequent increase in soil porosity and aeration resulting in reduction of bulk density [17]. A negative correlation was recorded between bulk density and soil porosity in both cultivator and disc plow operated fields. Generally, the soil water content increases with reducing soil bulk density. In the current study, the reverse case may be due to presence of more macro pores resulting in water loss.

TABLE 1. SOIL ANALYSIS OF EXPERIMENTAL SITE

Soil Property	Unit		Value (%)	
Sand	(%)		43	
Clay	(%)		47	
Silt	(%)		9	
Textural class	-		Clay	
Infiltration rate	cm hr-1		0.65	
Other Soil Physical Properties				
	0-15 cm	15-30 cm	30-45 cm	Mean
Moisture content (%)	13.98	15.5	20.77	16.75
Bulk density (g cm-3)	1.37	1.41	1.46	1.41

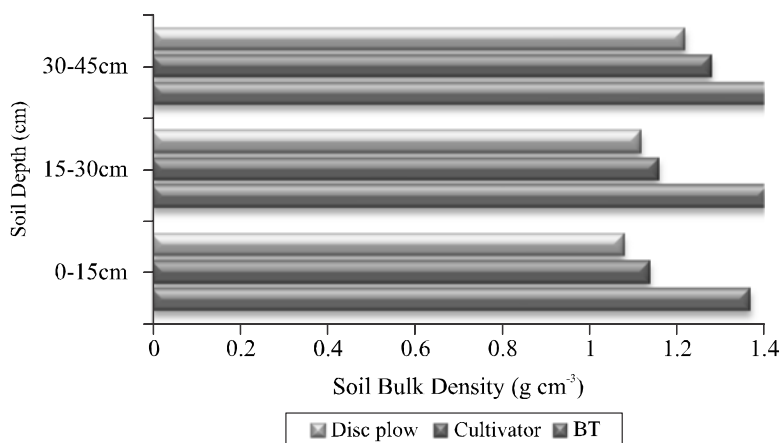


FIG. 1(a), SOIL POROSITY

The economic efficiency of tillage contributes much in cost of production. The current study divulges that using cultivator for tillage purpose can save 36% of fuel consumption as compared to disc plow. This may be attributed to high effective plough width (2.31m) in

contrast to that of disc plow (1.69m). The same results have been reported by Filipovic, et. al. [18] in which conservation tillage methods (I and II) saved energy (36-59%) as compared to conventional tillage system. More variation in such data is expected depending on the type

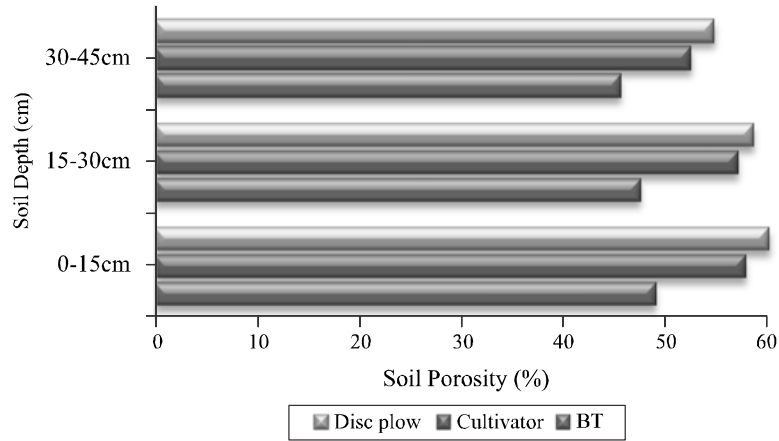


FIG. 1(b), MOISTURE CONTENT

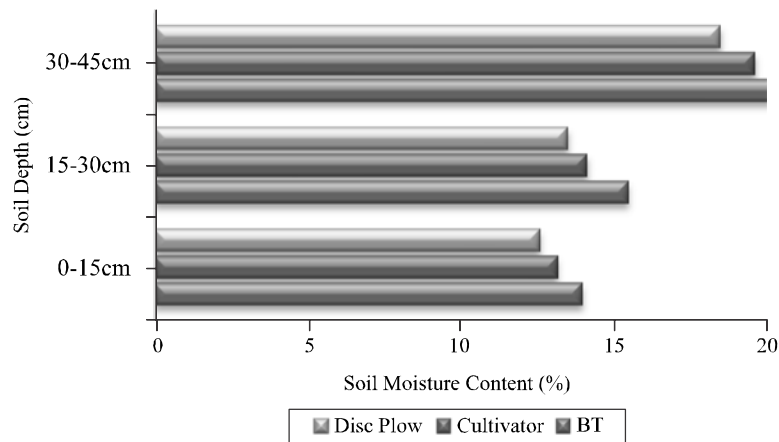


FIG. 1(c) AND INFILTRATION RATE

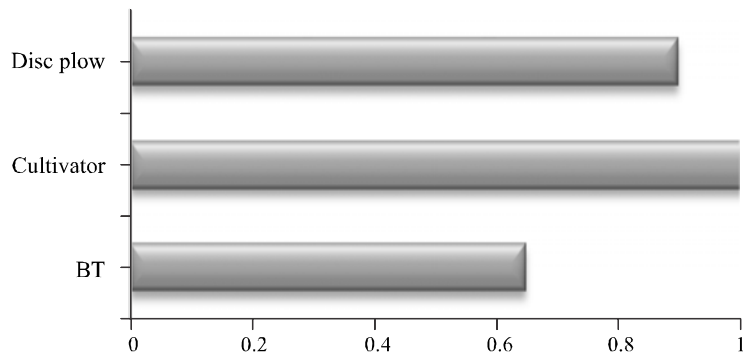


FIG. 1(d) AS AFFECTED BY OPERATING CULTIVATOR AND DISC PLOW BT=BEFORE TILLAGE

FIG. 1(a-d) SOIL BULK DENSITY

of soil, field conditions, plowing depth etc. For instance, fuel consumption values of 49.40L ha<sup>-1</sup> for moldboard plough and 31.30 L ha<sup>-1</sup> for chisel plough have been documented by Koller [19]. While Bashir, et. al. [20] reported fuel consumption of 15, 11.9 and 12.7 L ha<sup>-1</sup> for disc plow, chisel plow and disc harrow, respectively. A positive correlation of fuel consumption was recorded with travel reduction and effective plough depth. However, effective plough width, operating speed and effective field capacity were found to be negatively correlated with fuel consumption. The same trend of significant increase in fuel consumption with increasing plough depth has been reported by Adewoyin and Ajav [21]. However, positive correlation of operating speed with fuel consumption was reported possibly due to

different soil moisture content and tractor engine power. The effective plowing uching depth found negatively correlated with soil moisture content and bulk density (Table. 2). The results are in similarity with that of Parvin [22] who reported that the bulk density of soil tended to reduce with increased plough depth of moldboard plough in 0-15 and 15-30cm soil depth. However, the reduced moisture content with higher plough depth may be due to exposure of more soil volume to sunlight and low organic matter content that is reported to decrease with increasing depth of soil [23]. As shallow tillage has been recommended by some researchers [24-25], therefore, keeping in view the economic condition of Pakistani farmers, the study provides a clue to use cultivator for tillage operations in order to have positive effects on soil physical properties and farmer economy.

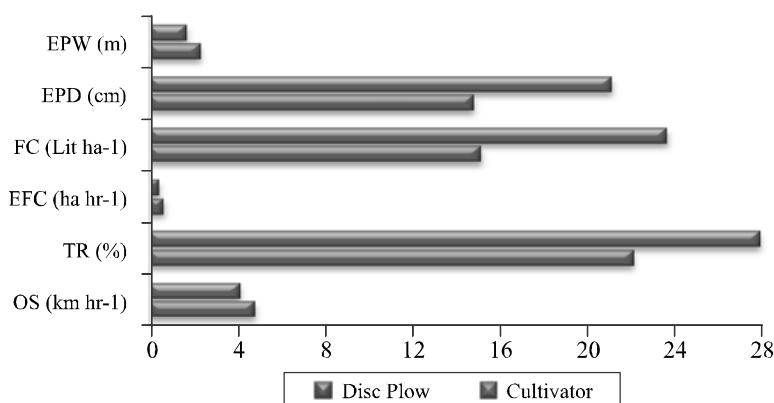


FIG. 2. RELATIVE EFFICIENCY OF DISC PLOW AND CULTIVATOR EPW/EPD=EFFEKTIVE PLOW WIDTH (M)/PLOW DEPTH (CM), FC=FUEL CONSUMPTION (L HR<sup>-1</sup>), EFC=EFFEKTIVE FIELD CAPACITY (HA HR<sup>-1</sup>), TR=TRAVEL REDUCTION (%), OS=OPERATING SPEED (KM HR<sup>-1</sup>)

TABLE 2. CORRELATION OF EFFECTIVE PLOWING WIDTH AND DEPTH OF TILLAGE IMPLEMENT WITH SOIL PROPERTIES

		EPD (cm)	EPW (m)	MC (%)	BD (g cm-3)
EPD (cm)	Pearson Correlation	1	-1.000**	-1.000**	-1.000**
	N	2	2	2	2
EPW (m)	Pearson Correlation	-1.000**	1	1.000**	1.000**
	N	2	2	2	2
MC (%)	Pearson Correlation	-1.000**	1.000**	1	1.000**
	N	2	2	2	2
BD (g cm-3)	Pearson Correlation	-1.000**	1.000**	1.000**	1
	N	2	2	2	2

\*\* Correlation is significant at the 0.01 level (2-tailed).

#### 4. CONCLUSION

The efficiency of most widely used tillage implements was carried out under the agro-climatic conditions of Tandojam. The study revealed that efficiency of tillage implements may vary with type of soil, soil moisture content and prevailing climatic conditions. In the current study, between the two cultivation implements, the cultivator being economically more efficient and having positive effect on soil properties, has been found the best option for tillage operations in the clay soils of Tandojam in cotton-wheat rotation system under semi-arid climatic conditions.

#### ACKNOWLEDGEMENTS

The authors are highly thankful to the members and staff of Department of Farm Power & Machinery, Faculty of Agricultural Engineering, Sindh Agricultural University, Tandojam, Pakistan, for their help in recording and analysis of field data.

#### REFERENCES

- [1] Karlen, D., Erbach, D., Kaspar, T., Colvin, T., Berry, E., and Timmons, D., "Soil Tillage: A Review of Past Perceptions and Future Needs", *Soil Science Society of America Journal*, Volume 54, No. 1, pp. 153-161, 1990.
- [2] Khurshid, K., Iqbal, M., Arif, M.S., and Nawaz, A., "Effect of Tillage and Mulch on Soil Physical Properties and Growth of Maize", *International Journal of Agriculture and Biology*, Volume 8, No. 5, pp. 593-596, 2006.
- [3] Iqbal, M., Hassan, A.U., Ali, A., and Rizwanullah, M., "Residual Effect of Tillage and Farm Manure on Some Soil Physical Properties and Growth of Wheat (*Triticum Aestivum* L.)", *International Journal of Agriculture and Biology*, Volume 7, No. 1, pp. 54-57, 2005.
- [4] Lal, R., and Stewart, B.A., "Principles of Sustainable Soil Management in Agroecosystems", CRC Press, 2013.
- [5] Dahab, M.H., "Effect of Selected Tillage Implements on Physical Properties of Two Types of Soils in Khartoum Area", *Agricultural Mechanization in Asia, Africa, and Latin America*, Volume 42, No. 2, 2011.
- [6] Sarauskis, E., Buragiene, S., Romaneckas, K., Sakalauskas, A., Jasinskis, A., Vaiciukevicius, E., and Karayel, D., "Working Time, Fuel Consumption and Economic Analysis of Different Tillage and Sowing Systems in Lithuania", *Proceedings of 11th International Scientific Conference on Engineering for Rural Development*. Jelgava, Latvia, 2012.
- [7] Moitzi, G., Weingartmann, H., and Boxberger, J., "Effects of Tillage Systems and Wheel Slip on Fuel Consumption", *The Union of Scientists-Rousse: Energy Efficiency and Agricultural Engineering*, Volume 7, No. 9, pp. 237-242, 2006.
- [8] Martínez-Abarca, F., Herrera-Cervera, J., Bueno, P., Sanjuan, J., Bisseling, T., and Olivares, J., "Involvement of Salicylic Acid in the Establishment of the Rhizobium Meliloti-Alfalfa Symbiosis", *Molecular Plant-Microbe Interactions*, Volume 11, No. 2, pp. 153-155, 1998.
- [9] Temesgen, M., Hoogmoed, W., Rockstrom, J., and Savenije, H., "Conservation Tillage Implements and Systems for Smallholder Farmers in Semi-Arid Ethiopia", *Soil and Tillage Research*, Volume 104, No. 1, pp. 185-191, 2009.
- [10] Morris, N., Miller, P., Orson, J., and Froud-Williams, R., "The Adoption of Non-Inversion Tillage Systems in the United Kingdom and the Agronomic Impact on Soil, Crops and the Environment—A Review", *Soil and Tillage Research*, Volume 108, No. 1, pp. 1-15, 2010.
- [11] RNAME, "Test Codes and Procedure for Farm Machinery", 2nd Edition, Rname Technical Publications, No. 12. Bangkok, RNAME 468, 1995.
- [12] Bouyoucos, G.J., "Hydrometer Method Improved for Making Particle Size Analyses of Soils", *Agronomy Journal*, Volume 54, No. 5, pp. 464-465, 1962.

- [13] Blake, G., and Hartge, K., "Bulk Density", in *Methods of Soil Analysis*", Klute, A., Editor, pp. 363-375, 1986.
- [14] Murtaza, G., Ghafoor, A., and Qadir, M., "Irrigation and Soil Management Strategies for Using Saline-Sodic Water in a Cotton–Wheat Rotation", *Agricultural Water Management*, Volume 81, No. 1, pp. 98-114, 2006.
- [15] Dam, R.F., Mehdi, B.B., Burgess, M.S.E., Madramootoo, C.A., Mehuys, G.R., and Callum, I.R., "Soil Bulk Density and Crop Yield under Eleven Consecutive Years of Corn with Different Tillage and Residue Practices in a Sandy Loam Soil in Central Canada", *Soil & Tillage Research*, Volume 84, No. 1, pp. 41-53, 2005.
- [16] Amin, M., Khan, M.J., Jan, M.T., Tariq, J.A., Hanif, M., and Shah, Z., "Effect of Different Tillage Practices on Soil Physical Properties under Wheat in Semi-Arid Environment", *Soil and Environment*, Volume 33, No. 1, pp. 33-37, 2014.
- [17] Osunbitan, J., Oyedele, D., and Adekalu, K., "Tillage Effects on Bulk Density, Hydraulic Conductivity and Strength of a Loamy Sand Soil in Southwestern Nigeria", *Soil and Tillage Research*, Volume 82, No. 1, pp. 57-64, 2005.
- [18] Filipovic, D., Copec, K., Gospodaric, Z., Kovacev, I., and Kosutic, S., "Energetic and Economics of Tillage Systems in Winter Wheat Production", *Poljoprivredna Tehnika*, Volume 32, pp. 39-45, 2007.
- [19] Koller, K., "Production De Cereales Sans Labour: Experiences Menees En Allemagne", *Revue Suisse d'agriculture*, Volume 28, No. 1, pp. 30-33, 1996.
- [20] Bashir, M., Dawelbeit, M., Eltom, M., and Tanakamaru, H., "Performance of Different Tillage Implements and Their Effects on Sorghum and Maize Grown in Gezira Vertisols, Sudan", *International Journal of Scientific & Technology Research*, Volume 4, No. 4, pp. 237-242, 2015.
- [21] Adewoyin, A.O., and Ajav, E.A., "Fuel Consumption of Some Tractor Models for Ploughing Operations in the Sandy-Loam Soil of Nigeria at Various Speeds and Ploughing Depths", *Agricultural Engineering International: CIGR Journal*, Volume 15, No. 3, pp. 67-74, 2013.
- [22] Parvin, N., "Influence of Mouldboard Ploughing and Shallow Tillage on Soil Physical Properties and Crop Performance", 2012.
- [23] Tsimba, R., Hussein, J., and Ndlovu, L., "Relationships between Depth of Tillage and Soil Physical Characteristics of Sites Farmed by Smallholders in Mutoko and Chinyika in Zimbabwe", On: <http://www.fao.org/ag/ags/agse/3ero/namibia1/c11.html>, 2007.
- [24] Raper, R., Reeves, D., Schwab, E., and Burmester, C., "Reducing Soil Compaction of Tennessee Valley Soils in Conservation Tillage Systems", *Journal of Cotton Sciences*, Volume 4, No. 2, pp. 84-90, 2000.
- [25] Kouwenhoven, J., Perdok, U., and Boer, J., "Soil Management by Shallow Mouldboard Ploughing in the Netherlands", *Soil & Tillage Research*, Volume 65, No. 2, pp. 125-139, 2002.